

DPS Grant – Replacement of Two(2) 20HP Vertical Pumps

Location: 3100 Grant St. New Orleans LA, 70127 – On Almonaster between Read Blvd and Old Gentilly Rd, Near Boh Brothers

Proposals:

Proposals must include lump sum pricing for all work included in the Scope of Work below. Proposals must include a schedule/timeline for all work and anticipated completion date. Selected bidder must provide submittal for attached specified pump, or approved equivalent following included pump specification and pump curve.

Proposals to be submitted by 12:00 PM on Thursday 8/24/2017 to Thomas Moore at tmoore@swbno.org, and copy Chris Bergeron at cbergeron@swbno.org.

Vendor must include the following with their proposal submission:

- Insurance policy
- Performance bond
- EDBP Summary Sheet & corresponding letters from the subs (10% GOAL)
- Pricing

ALL SUPPORTING DOCUMENTATION MUST ALSO BE TURNED IN TO THE PROCUREMENT DEPARTMENT (Willie Mingo).

Scope of Work:

Pump #2:

- Remove existing vertical pump (#2)
- Retain existing motor for pump #2 and deliver to SWB
- Furnish and install new fabricated pump with 20HP motor in place of Pump #2
 - New pump must fit existing conditions for suction tube length and flange connections
- Remove existing check valve and spool piece on discharge side of Pump #2
- Furnish and install new fabricated check valve and spool piece on discharge side of Pump #2
 - New check and spool piece must fit existing conditions for flange-to-flange length and bolt hole pattern
- Align flange-to-flange connection as necessary for Pump #2

Pump #4:

- Furnish and install new fabricated pump with 20HP motor in existing location (no pump is currently installed in Pump #4 location)
 - New pump must fit existing conditions for suction tube length
- Furnish and install new fabricated check valve and spool piece on discharge side of Pump #4

- New check and spool piece must fit existing conditions for flange-to-flange length and bolt hole pattern
- Furnish and Install new fabricated dresser coupling for discharge piping for Pump #4
- Align discharge piping and flange as necessary for installation of Pump #4

Disposal:

- Contractor will be responsible for disposal of all materials not specifically instructed to be returned to the Sewerage and Water Board.

Industrial & Mechanical Contractors, Inc.

- P.O. BOX 10008 • 757 CENTRAL AVENUE •
- JEFFERSON, LOUISIANA 70181 •
- (504) 733-9141 FAX (504) 733-9144 •

Sewerage and Water Board New Orleans
Project - Replacement of Pumps at the
Replacement of (2) 14" Pumps at DPS- Grant St.

August 24, 2017


Mr. Moore,

Industrial and Mechanical Contractors Proposes to Remove (1) 14" Vertical Pump and Motor and Install (2) 14" Vertical Pumps and (2) Check Valves and Tie Into Existing 14" Piping for the Lump Sum Price of price of

\$103,880.00 (One Hundred Three Thousand, Eight Hundred Eighty Dollars and 00/100 cents)

Respectfully,

Brian E. Andre

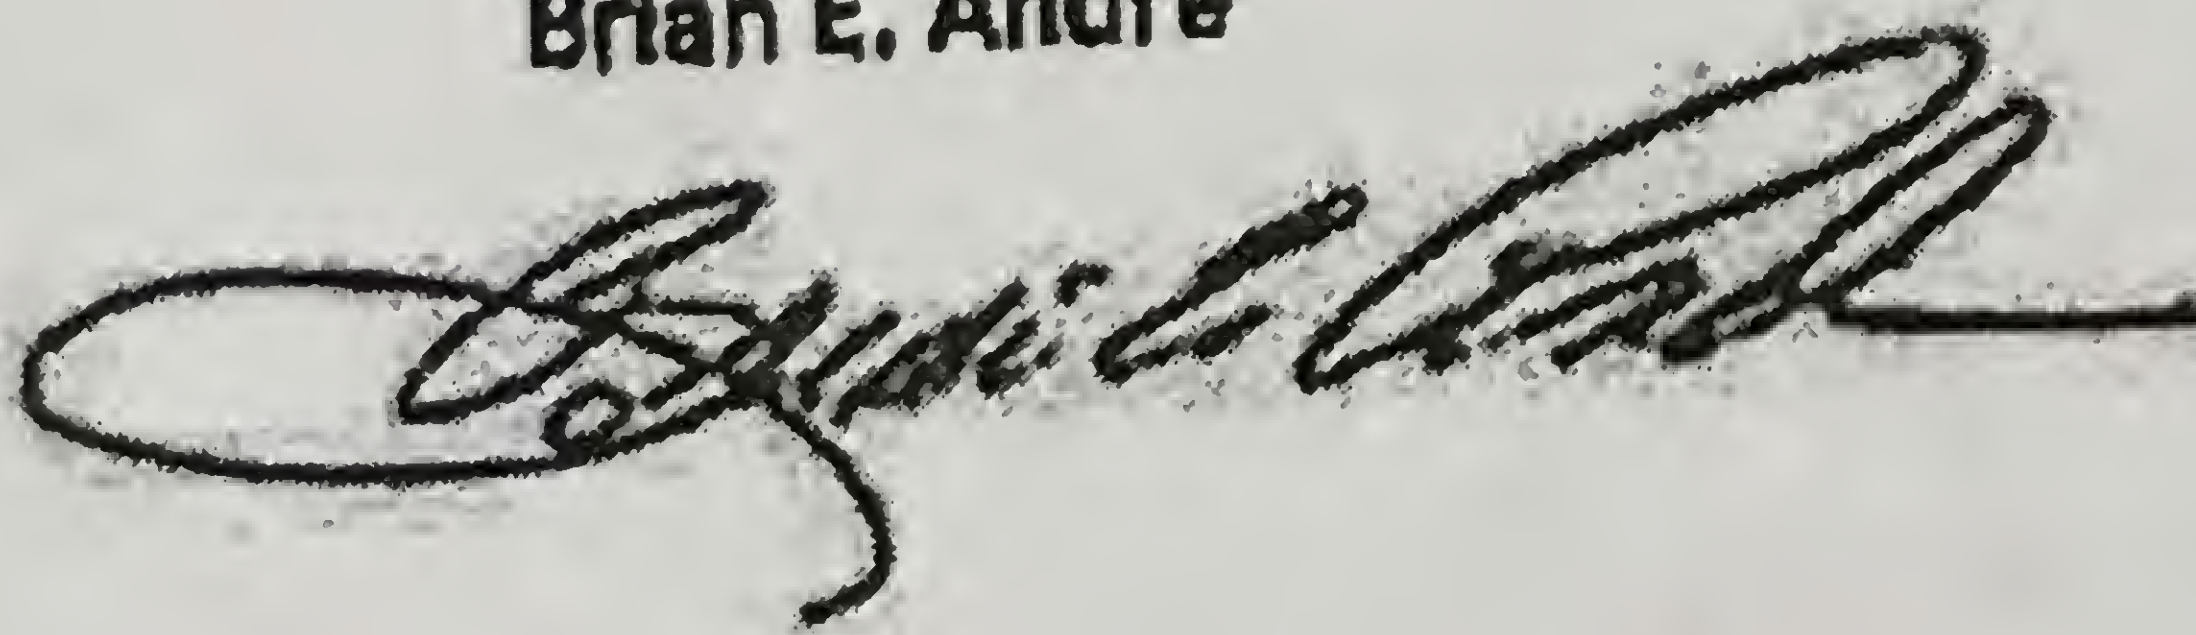

Sewerage and Water Board New Orleans
Replacement of (2) 14" Verticle Pumps at DPS-Grant St.

Contract #

Proposal 8/24/2017

Contractor

Industrial & Mechanical Contractors, Inc.

PROJECT

N.O.S&W.B.
Replacement of Pumps at DPS-Grant St.

Line Item ID	Description	Scheduled Value
1	Mobilization	\$8,210.00
2	Remove Existing Pump #2 and return to SWB	\$7,500.00
3	Install New Pump #2	\$30,415.00
4	Install New Pump #4	\$31,415.00
5	Install Check Valve Pump #2	\$10,670.00
6	Install Check Valve Pump #4	\$10,670.00
7	Electrical Work	\$5,000.00
	TOTAL	\$103,880.00